

## BENEFITS



### AIR AS REFRIGERANT

0 GWP, 0 ODP, and 0 TFA  
Environmentally friendly  
Refrigerant free of charge



### TEMPERATURE STABILITY

± 0.5°C under changing load



### ENERGY EFFICIENCY

High cycle efficiency  
Inverter driven motor



### NO VIBRATION

Turbo-compressor design  
eliminates vibration



### LOW OPERATING COSTS

Long equipment lifecycle  
Low maintenance



### TEMPERATURE RANGE

Any temperature  
from -160°C to +90°C



### WARRANTY

2 years of warranty



### ISO CERTIFICATION

ISO 9001:2020 certified



### MACHINE WHEELS

For convenience transportation of  
machine in manufacture

## OPTIONS



### REMOTE MONITORING

Available remote monitoring or  
remote access systems



### VARIOUS HIGH-LEVEL COMMUNICATION PROTOCOLS



### INDIVIDUAL HTF CONNECTION



### INDIVIDUAL WATER CONNECTION



### EXTENDED WARRANTY

Up to 3 years



### EXTERNAL EXPANSION TANK

Installation of external expansion  
tank, up to 80 liters in capacity



© 2024 MIRAI Intex®. 11/2024- Preliminary

Introducing the **MIRAI X CRYO 40**, our latest innovation in cryochiller technology.

This chiller is designed to meet the expectations of the most demanding industries.

A compact and powerful cryochiller in one - just what the most demanding manufacturers are looking for.

The latest model **MIRAI X CRYO** is available in motor power of **40 kW**.

### COMPLIANCE WITH EU ENVIROMENTAL REGULATIONS

The **MIRAI X CRYO** is fully compliant with EU and global environmental standards, including REACH, RoHS, and F-gas regulation. This compliance underscores our dedication to producing systems that not only meet but exceed the most stringent environmental requirements.

### THE WIDEST TEMPERATURE RANGE

**MIRAI X CRYO** has a temperature range from -160°C to +90°C with temperature accuracy **± 0.5 °C** under changing load.

### VARIOUS INDUSTRY APPLICATIONS

**MIRAI Intex** machines are suitable for a wide range of applications. **MIRAI X CRYO** was developed for demanding industrial processes.

### FAST COOL DOWN SPEED

From +40°C to -100°C within 2 minutes.


### ZERO GWP

MIRAI Intex use only air cycle technology in its products. **MIRAI X CRYO** is 100% eco-friendly, has **0 GWP** and **0 ODP**, that helps for **Sustainable Development** of the industry.

## GRAPHS

### COOLING CAPACITY

Cooling capacity of the **MIRAI X CRYO 40 kW** over a temperature range of -40°C to -150°C. At cooling water temperature +10°C.

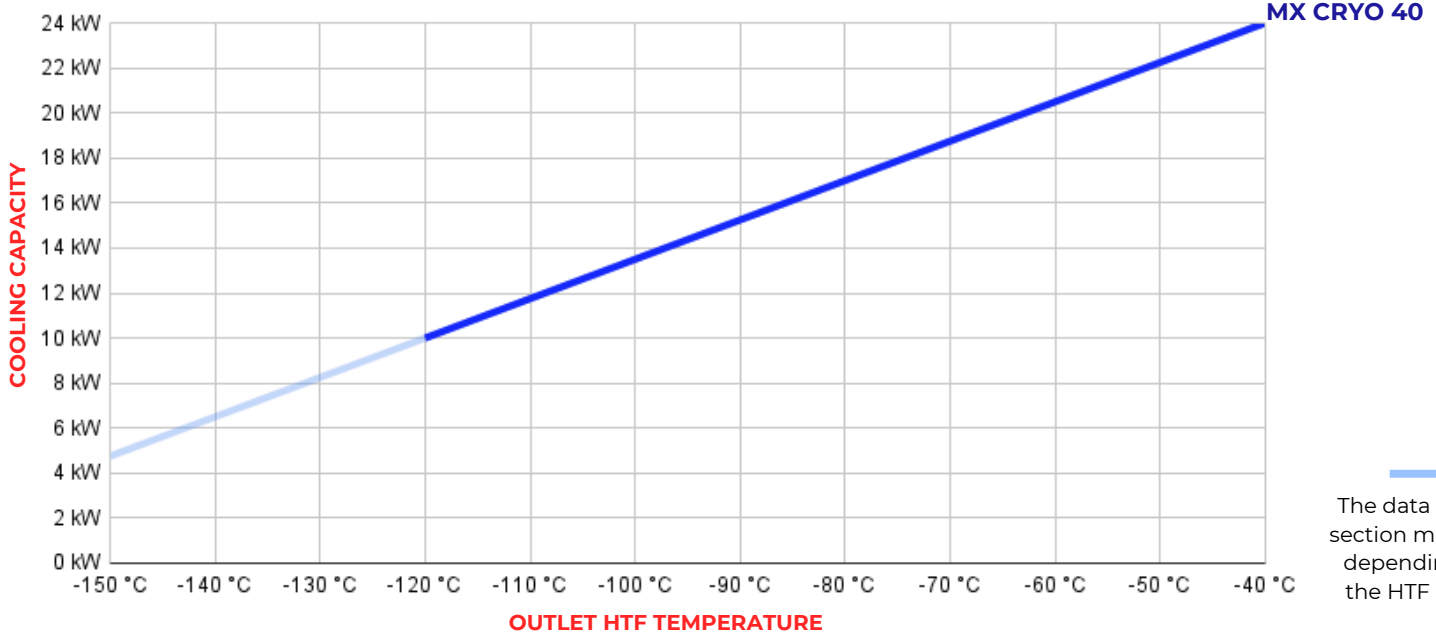

The data in this section may vary depending on the HTF used

© 2024 MIRAI Intex®. 11/2024- Preliminary

## INSTALLATION

### PLUG AND PLAY SOLUTION

The **MIRAI X CRYO** machine is the ideal solution for retrofitting in existing installation and is easy to implement in new projects due to its Plug and Play design, compatible with multiple industry standard connection types.


Also, it is ideal solution when you need to have powerful and compact machine.

## DESIGN FEATURES

### CONTROL PANEL



### HTF INLET/OUTLET



### WATER INLET/OUTLET



## CONTROL PANEL

The control panel is a tool for setting the operating modes of the machine, there are 3 modes in total:

- » Cooling mode
- » Heating mode
- » Standby mode

This control panel allows you to easily change settings without any additional intervention in the machine, simply by using the touch screen or by sending a command signal from high-level control system.

Allows to use industrial protocols:

- » ProfiNET
- » EtherCAT
- » EtherNET/IP
- » Powerlink

\*Another protocols by request.

## COMPLIANCE

- » Pressure equipment directive (PED) 2017/68/EU, Module A2 Certificate
- » Electromagnetic compatibility directive (EMC) Directive 2014/30/EU Certificate
- » Low voltage directive (LVD) 2014/35/EU Certificate
- » Machinery directive (MD) 2006/42/EC
- » F-gas regulation
- » Reach, Rohs

## SPECIFICATIONS MIRAI X CRYO 40


TECHNICAL DATA	MX CRYO 40
<b>AIR-CYCLE</b>	
TEMPERATURE RANGE*	from -160°C up to +90°C
RATED MOTOR POWER (kW)	40
REFRIGERATION CAPACITY (-100°C)**/(-80°C) (kW)	13.2/16.9
TEMPERATURE ACCURACY UNDER CHANGING LOAD	±0.5°C
REFRIGERANT	Natural Air (R729)
COMPRESSOR	Mirai Turbo-Compressor (water-cooled)
<b>HTF PARAMETERS</b>	
MIN PRESSURE (bar)	1
MAX PRESSURE (bar)	10
NOMINAL**/MAX ALLOWED PROCESS PRESSURE DROP*** (kPa)	20/400
MIN HTF FLOW (l/h)	1600
NOMINAL HTF FLOW (l/h)**	3000
MAX HTF FLOW (l/h)	4800
<b>WATER COOLING</b>	
WATER CONNECTION	DN 50/2"
NOMINAL PRESSURE DROP (bar)	2.5
MAX ALLOWED PRESSURE ON WATER INLET (bar)	10
COOLING WATER TEMPERATURE RANGE	from +5°C to +30°C (other temperatures are possible on request)
MIN WATER FLOW (kg/h)	7300
NOMINAL COOLING WATER MASS FLOW (kg/h)	8700
MAX WATER FLOW (kg/h)	9900
<b>GENERAL TECHNICAL SPECIFICATION</b>	
SAFETY PROTECTION	High pressure protection, water supply cut-off protection, over-current protection, high temperature protection, sensor failure protection, Heater protection
SOUND PRESSURE, AT A DISTANCE OF 1M FROM RM (dB)	Up to 80
CONTROL SYSTEM	KEB system compatible with digital communication protocols ProfiNET, EtherCAT, EtherNET/IP, and Powerlink. Another protocols by request
HTF CONNECTION	DN 40 PN16/ 1.5"
<b>POWER REQUIRMENTS</b>	
POWER SUPPLY	~3PE, 400 V/440V/480V , 50HZ/60 Hz
TOTAL CONSUMPTION/WITH BOOST MODE (kW)	50/66
REFRIGERATION (kW)	44
HEATING (kW)	18
PUMP (kW)	4.0
NOMINAL CURRENT/WITH BOOST MODE (A)	75/100
<b>DIMENSIONS</b>	
DIMENSIONS (HxLxW) ±5 mm	1972x1770x800
WEIGHT (kg)	1800

\*THE TEMPERATURE RANGE VARIES BASED ON THE TYPE OF HTF SELECTED AND WILL BE CONFIRMED DURING THE ORDERING PROCESS.


\*\*DATA ARE SPECIFIED FOR FRAGOLTERM X-T9-A OIL (INLET=-90°C / OUTLET=-100°C) AT COOLING WATER +10°C

\*\*\*COOLING CAPACITY WILL BE REDUCES BY 2.3 kW

## DIMENSIONS

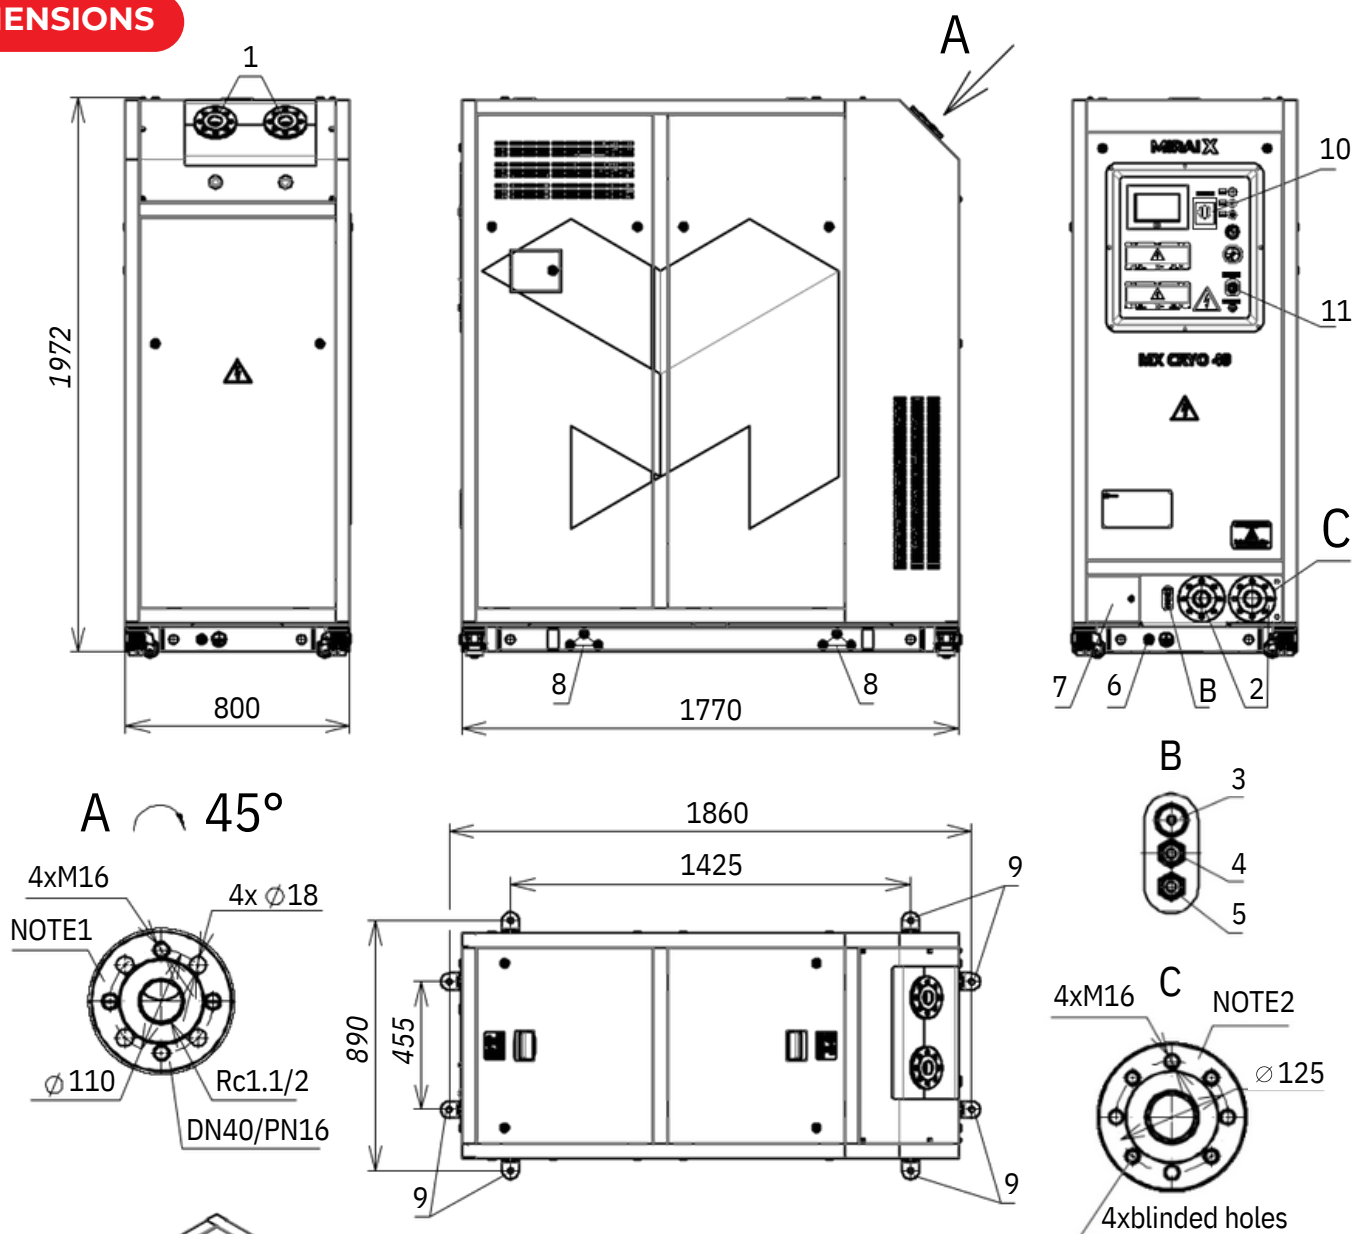

© 2024 MIRAI Intex®, 11/2024- Preliminary

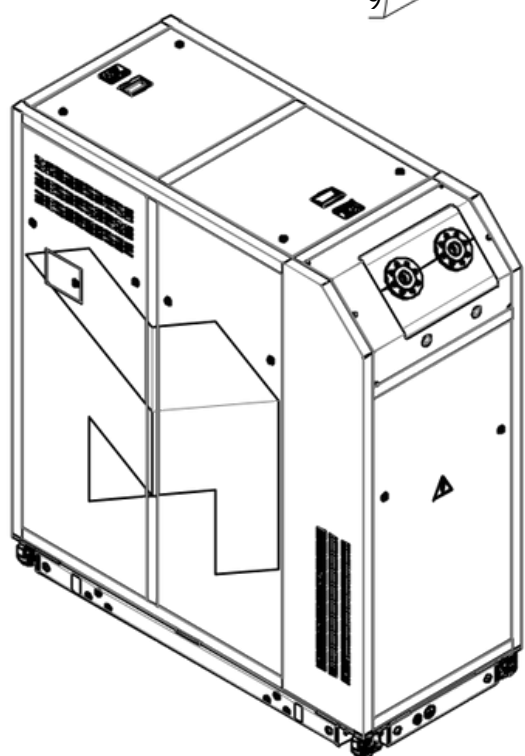

1. Heat transfer fluid (HTF) connection:  
flange EN1092-1/DN40/PN16 or Rc1.1/2
2. Cooling water/glycol mixture: flange EN1092-1/  
DN50/PN16 or G2
3. Air/Nitrogen, Quick disconnect coupling DN 7.2  
(Euro standard)
4. Cooling liquid drain, Connection for plastic tube 8/6 mm
5. Condensate drain, Connection for plastic tube 8/6 mm
6. Grounding point (PE) - M16
7. Power connection hatch
8. Sliding place
9. Fixing place to floor (optionally with brackets,  
possibility of fixation from any side)
10. Main switch
11. Emergency stop button

Mirai Intex: MX CRYO 40