

MIRAI X CRYO

WHERE HEAT MEETS COLD

Developed for process cooling
from -120 °C to +50 °C and
various industry applications

PRODUCT SPECIFICATIONS

- **THE WIDEST TEMPERATURE RANGE**

From -120 °C to +50 °C
Accuracy ± 0.025 °C at idle

- **FAST COOL DOWN SPEED**

From +20 °C to -100 °C in 30 seconds

- **BOOST MODE**

Up to 7.5 kW additional capacity

- **MOTOR POWER**

10 kW, 15 kW, 20 kW

- **VARIOUS INDUSTRY APPLICATIONS**

- **ZERO GWP**

With the air cycle technology



BENEFITS



AIR AS REFRIGERANT

0 GWP, 0 ODP, and 0 TFA
Environmentally friendly
Refrigerant free of charge



TEMPERATURE STABILITY

0.025°C accuracy at idle
± 0,5°C under changing load



ENERGY EFFICIENCY

High cycle efficiency
Inverter driven motor



NO VIBRATION

Turbo-compressor design
eliminates vibration



LOW OPERATING COSTS

Long equipment lifecycle
Low maintenance



TEMPERATURE RANGE

Any temperature
from -120 to +50 degrees



WARRANTY

2 years of warranty



ISO CERTIFICATION

ISO 9001:2020 certified



HTF EXPANSION TANK

Easy HTF (Heat transfer fluid)
refill

OPTIONS



REMOTE MONITORING

Available remote monitoring or
remote access systems



MACHINE WHEELS

For convenience transportation of
machine in manufacture



VARIOUS HIGH-LEVEL COMMUNICATION PROTOCOLS



INDIVIDUAL HTF CONNECTION



INDIVIDUAL WATER CONNECTION



EXTENDED WARRANTY

Up to 3 years



Introducing the **MIRAI X CRYO**, our latest innovation in cryochiller technology. This advanced refrigeration system is tailored to meet the diverse needs of industries ranging from semiconductor manufacturing to vacuum drying and pharma applications.

The **MIRAI X CRYO** is available in three motor power configurations: **10 kW, 15 kW, and 20 kW**, accommodating a variety of application requirements.

COMPLIANCE WITH EU ENVIRONMENTAL REGULATIONS

The **MIRAI X CRYO** is fully compliant with EU and global environmental standards, including REACH, RoHS, and F-gas regulation. This compliance underscores our dedication to producing systems that not only meet but exceed the most stringent environmental requirements.

THE WIDEST TEMPERATURE RANGE

MIRAI X CRYO has a temperature range from -120 °C to +50 °C with temperature accuracy ± 0.025 °C at idle.

FAST COOL DOWN SPEED

From +20 °C to -100 °C in 30 sec.

BOOST MODE

The feature that allows **MIRAI X CRYO** to have up to **7.5 kW additional capacity for 5 minutes**.

VARIOUS INDUSTRY APPLICATIONS

MIRAI Intex machines are suitable for a wide range of applications. **MIRAI X CRYO** was developed for industrial processes, vacuum coating and etching.

ZERO GWP

With the air cycle technology, **MIRAI X CRYO** is 100% eco-friendly.

BOOST CHARGING TIME

6 min

(during waiting or heating mode)

MACHINE AVAILABILITY TIME AFTER SWITCHING ON

Standard - **25 min**
With boost mode - **35 min**

CONSUMER COOLING RATE +40°C/-100°C

Standard up to **5 min**
With boost mode up to **2 min**

CONSUMER HEATING RATE -100°C/+40°C

Standard up to **5 min**

INSTALLATION

PLUG AND PLAY SOLUTION

The **MIRAI X CRYO** machine is the ideal solution for retrofitting in existing installation and is easy to implement in new projects due to its Plug and Play design, compatible with multiple industry standard connection types.

See the **MIRAI X CRYO** chiller in action across various industries, from vacuum coating and semiconductor manufacturing to food processing and pharmaceuticals.




SETTINGS WINDOW

STANDBY WITH CHARGED BOOST



COOLING MODE

HEATING MODE

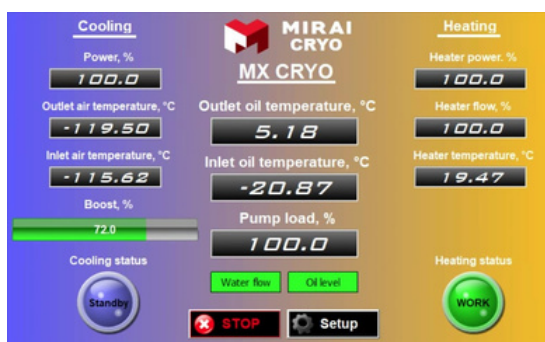

CONTROL PANEL

The control panel is a tool for setting the operating modes of the machine, there are 3 modes in total:

- » Cooling mode
- » Heating mode
- » Standby mode

This control panel allows you to easily change settings without any additional intervention in the machine, simply by using the touch screen or by sending a command signal via high-level control.

Allows to use industrial protocols:

- » ProfiNET
- » EtherCAT
- » EtherNET/IP
- » Powerlink

*Another protocols by request.

DESIGN FEATURES

HTF LEVEL AND PRESSURE GAUGES


TANK FOR REFILLING THE HTF IN THE MACHINE



GRAPHS

COOLING CAPACITY


Cooling capacity of the **MIRAI X CRYO** over a temperature range of -40 °C to -120°C. At cooling water temperature +10 °C.

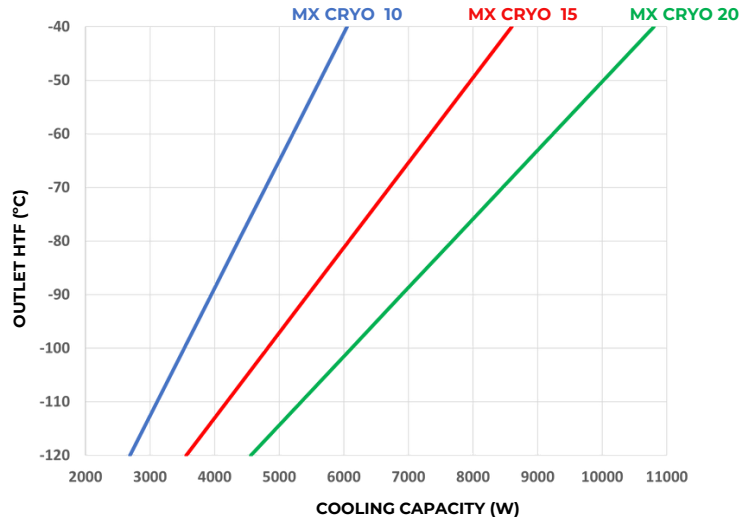

COLD POWER BOOST

At -80°C setpoint, the machine cools to -110°C and accumulates cold energy with boost and generated following power. The system can accumulate boost when operating in heating or standby mode.

*+Cooling capacity of machine

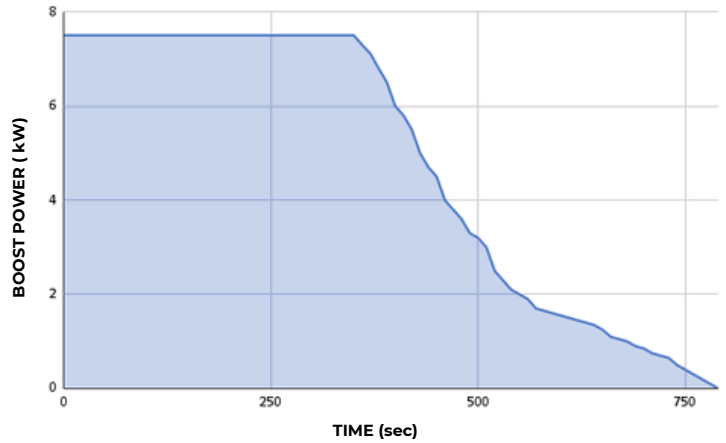


PERFORMANCE

This test focuses on temperature maintenance when the heat load on the machine is changing. Specifically in this case, the test was conducted at a change from 0 kW to 7 kW. The results showed that temperature **control under changing load is ± 0.5°**.

Above the graph is the time interval when the test started and ended, how long the loads were measured for.

The mark [*] -indicates the location where the temperature change was measured.

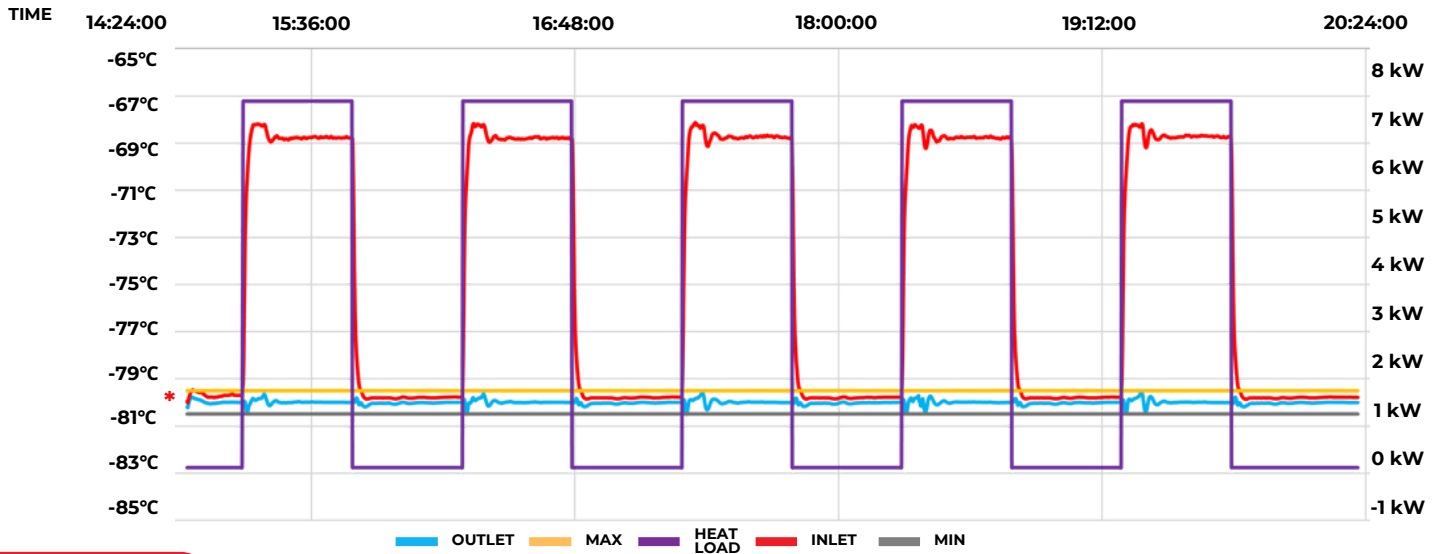

FEATURES

PRESSURIZATION

Automatic refrigerant pressure control and adjustment

HMI

7" color touch screen display, parameter graphs, system control

FAST COOL DOWN SPEED

From +20°C to -100°C in 30 seconds

COMPLIANCE

- » Pressure equipment directive (PED) 2017/68/EU, Module A2 Certificate
- » Electromagnetic compatibility directive (EMC) Directive 2014/30/EU Certificate
- » Low voltage directive (LVD) 2014/35/EU Certificate
- » Machinery directive (MD) 2006/42/EC
- » F-gas regulation
- » Reach, Rohs

SELF-DIAGNOSTICS

The **MIRAI X CRYO** machine is equipped with sensors that immediately send a signal of any potential malfunction

SPECIFICATIONS MIRAI X CRYO

MIRAI Intex is not responsible for potential mistakes in the provided data.

TECHNICAL DATA	MX CRYO 10	MX CRYO 15	MX CRYO 20
AIR-CYCLE			
TEMPERATURE RANGE	from -120°C up to +50°C		
RATED MOTOR POWER (kW)	10	15	20
REFRIGERATION CAPACITY (-80°C)* (kW)	4,4	6,1	7,7
TEMPERATURE ACCURACY AT IDLE	±0.025°C		
REFRIGERANT	Natural Air (R729)		
COMPRESSOR	Mirai Turbo-Compressor (water-cooled)		
HTF PARAMETERS			
MIN PRESSURE (bar)	1		
MAX PRESSURE (bar)	10		
NOMINAL*/MAX ALLOWED PROCESS PRESSURE DROP** (kPa)	20/50		
MIN HTF FLOW (l/h)	450	630	810
NOMINAL HTF FLOW (l/h)*	900	1260	1620
MAX HTF FLOW (l/h)	2000		
WATER COOLING			
WATER CONNECTION	DN 15		
PRESSURE DROP, NOMINAL (bar)	1,2	0,8	1,2
MAXIMUM ALLOWED PRESSURE ON WATER INLET (bar)	4	10	10
COOLING WATER TEMPERATURE RANGE	from +6 °C to +30 °C (other temperatures are possible on request)		
MIN WATER FLOW (kg/h)	1200	1500	2000
NOMINAL COOLING WATER MASS FLOW (kg/h)	2000	2350	2500
MAX WATER FLOW (kg/h)	4000		
GENERAL TECHNICAL SPECIFICATION			
SAFETY PROTECTION	High pressure protection, water supply cut-off protection, over-current protection, sequential and phase failure protection, high temperature protection, sensor failure protection, Heater protection		
SOUND PRESSURE, AT A DISTANCE OF 1M FROM RM (dB)	Up to 75		
CONTROL SYSTEM	KEB system compatible with digital communication protocols ProfiNET, EtherCAT, EtherNET/IP, and Powerlink. Another protocols by request		
HTF CONNECTION	Any, upon customer specifications		
POWER REQUIRMENTS			
POWER SUPPLY	~3 PE+N/3PE, 400 V/440V/480V , 50HZ/60 Hz		
REFRIGERATION (kW)	13,5	18,2	22
TOTAL CONSUMPTION (kW)	25,5	30,2	34
HEATING (kW)	12		
PUMP (kW)	2.2		
DIMENSIONS			
DIMENSIONS (HxLxW) ±5 mm	1880x1340x990		
HTF TANK VOLUME (l)	17		
HTF TANK LOAD (l)	10		
WEIGHT (kg)	860		
MAX VOLUME HTF CIRCUIT MIRAI (l)	~32		
MAX VOLUME HTF CIRCUIT CLIENT PROCESS (l)	~25		

*DATA ARE SPECIFIED FOR FRAGOLTERM X-T9-A OIL (INLET=-70 °C / OUTLET=-80 °C) AT COOLING WATER +10°C

**COOLING CAPACITY WILL REDUCE BY 600 W

DIMENSIONS

